


ICARUS - RECEIVERS

RX Mini

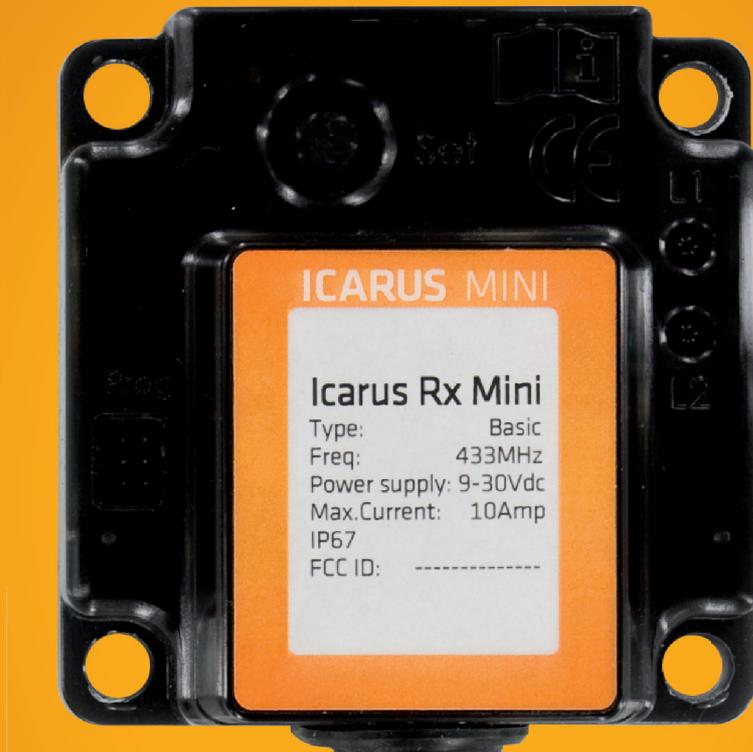

RX MINI

The RX Mini is the small, compact receiver of the ICARUS family. The potted housing guarantees protection against water and dirt (protective class IP 67) and is extremely sturdy.

Up to 24 transmitters can be logged on and off. At any time, the status as well as the error messages of the recipient can be read out based on the existing LEDs.




TECHNICAL DATA

RX Mini

ICP
INTELLIGENT CREATIVE PRODUCTS GMBH

Manderscheidstraße 8b
45141 Essen
Germany

Phone +49 (0)201 5367973
Fax +49 (0)201 5368293
E-mail info@i-c-p.net
Web www.i-c-p.net

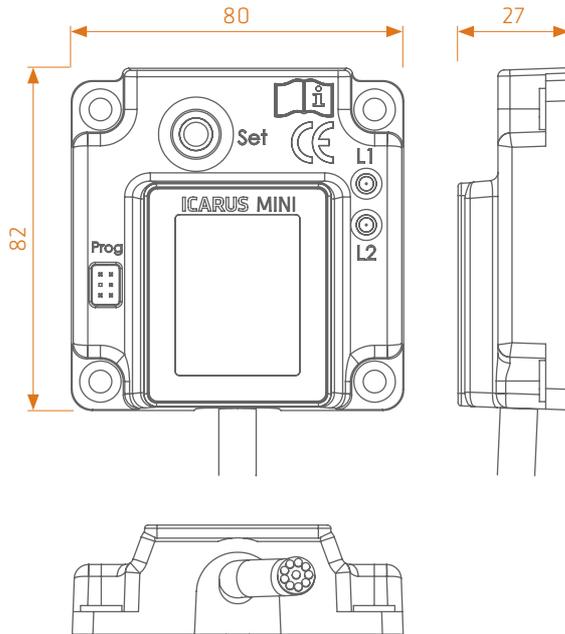

GENERAL

- Frequency: 433MHz
- Sensitivity: -110dBm
- Number of channels: 6
- Number of transmitters: max. 24
- Number of outputs: 6+2 (digital)
- Number of inputs: 2 (digital)
- Max. switching power: 2.5A (per output)
- Reaction time: < 40ms
- Antenna: Internal
- IP protection rating: IP 67
- Voltage: 9-30Vdc
- Energy consumption: < 1W (no output active)
- Max. current: 10A
- Dimensions: 82 × 80 × 27mm
- Weight: Approx. 280g

WORK AREA

- Range: Approx. 100m (depending on surroundings)
- Temperature: -30°C to +70°C
- Air humidity: 10% - 95%
- Housing material: ABS
- Working altitude: < 2000 m.a.s.l

ADDITIONAL

- Compatible to Tx Mini and Tx Heavy
- Series connection of receivers possible

OPTIONAL

- Extern antenna
- Individual software configuration using the same hardware



Specifications subject to change without notice.