

ICARUS - TRANSMITTERS

# TX Mini



## TX MINI

The TX Mini is the smaller transmitter of the ICARUS family and is appealing due to its very good ergonomics in conjunction with a high level of sturdiness.


Water and dirt are not a problem for this remote control due to protective class IP67.

The minimum power consumption results in a long battery service life and by programming an individual code, incorrect commands in relation to each other can be precluded from the start. Equipped with two to six buttons, the ICARUS TX Mini can be used in the widest range of areas



## TECHNICAL DATA

# TX Mini

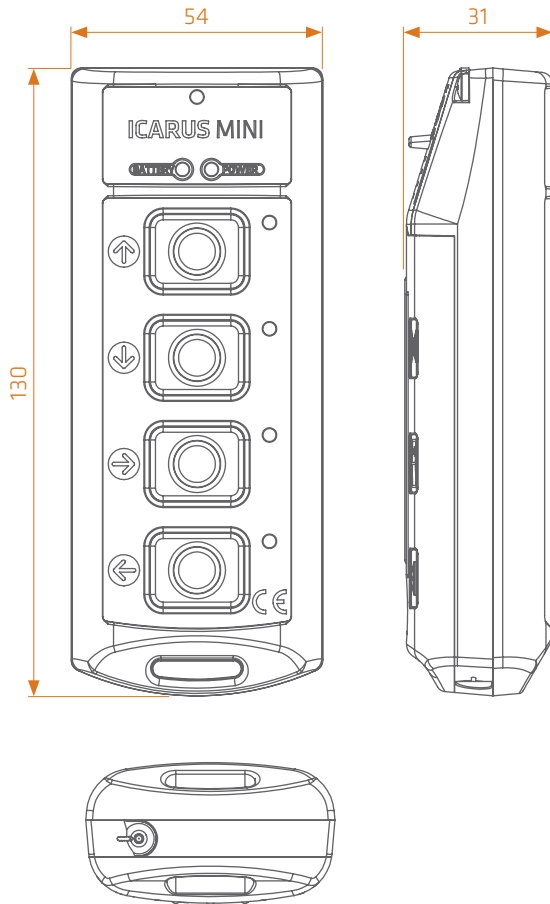

### ICP

INTELLIGENT CREATIVE PRODUCTS GMBH

Manderscheidstraße 8b  
45141 Essen  
Germany

Phone +49 (0)201 5367973  
Fax +49 (0)201 5368293  
E-mail [info@i-c-p.net](mailto:info@i-c-p.net)  
Web [www.i-c-p.net](http://www.i-c-p.net)

### GENERAL

- Frequency: 433MHz
- Number of channels: 6
- Number of buttons: max. 6
- Transmitter output: <10mW
- Reaction time: < 40ms
- Antenna: Internal
- Batteries: 3x Type AA (normal or rechargeable)
- IP protection rating: IP 67
- Dimensions: 130 × 54 × 31mm
- Weight: 185g (including batteries)

### WORK AREA

- Range: Approx. 100m (depending on surroundings)
- Temperature: -20°C to +50°C (depending on the battery)
- Air humidity: 10% - 95%
- Housing material: PC - ABS
- Working altitude: < 2000 m.a.s.l

### ADDITIONAL

- Compatible to Rx Mini and Rx Heavy

### OPTIONAL

- battery charger
- Individual software configuration using the same hardware
- 2-6 buttons



Specifications subject to change without notice.